

DreamScape®

Murals Wall Graphics
Ceiling Art Fine Art Giclee
DIGITAL WALLCOVERINGS




Bring your design to life with IMPACT & DAZZLE.

TEXTURED WALL MEDIA

specially developed and optically tuned
for digital printing on wide-format solvent,
eco-solvent, UV-Curable and Latex printers



REACH NEW CUSTOMERS! GET INTO THIS FAST GROWING MARKET!

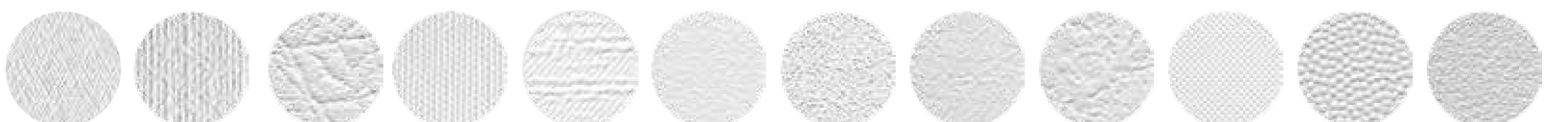

Criss Cross

Canvas

Cabretta

Artist Canvas

Silk

Suede

Mystical

Pueblo

Plaster

Pique

Beads

Sandblast



FOR MORE INFORMATION CONTACT:

973.625.7923

sales@dreamscapewalls.com

www.dreamscapewalls.com

TEXTURED WALL MEDIA

- High performance strippable commercial grade Type II wallcovering featuring "Easy up, Easy down" system
- Specially designed for high volume digital output
- Available in widths of 54", 60", 75" and lengths of 75', 150', and 300' to fit a wide range of applications
- Exceeds US, Canadian and European Flame and Smoke Requirements. Tested and approved using off the shelf available adhesives
- Meets all CCCW 408D Mildew and Fungal Resistance for wallcovering based on ASTM G21 testing mounting and commercially available adhesives
- Special bulk skid packaging for large volume orders; easier to use, less packaging waste
- Self Extinguishing Technology
- NO ROLL SPLICES!
- Packaging in heavy duty reusable tubes
- Formulated without Lead and Cadmium
- NEW! Now made with LOW VOC vinyl. Tested per CA 1350 air quality standards.
- WA certified NSF 342 Sustainability Standard



Restaurant/Ceiling Installation on Luster



Restaurant Chain/Wallcoverings on Suede



Restaurant/Wall & ceiling coverings on Artist Canvas



Office/Wallcovering on Mystical



Retail/Columns, Soffits, & Wallcoverings on Suede

PRODUCT PACKAGING

Each roll is meticulously packaged in a re-usable heavy duty tube

(No flat spots, no creases, no splices)

STD Lengths: 75', 150', 300'

STD Widths: 54", 60", 75" (+/- 1/8")

Core Diameter: 3 inches i.d. Heavy-Duty

*Custom lengths and widths available on request

PHYSICAL PROPERTIES

Product Weight: 20 oz. per lineal yd., (13oz. per sq. yd.)

Vinyl Weight: 17 oz. per lineal yd.

Fabric Weight: 3 oz. per lineal yd.

Thickness: 0.015 to 0.030 in.

*depending on texture

Fabric: Poly-Cotton Osnaburg or

Polyester Nonwoven

*depending on texture

BREAKING STRENGTHS, LBS. FORCE

Machine Direction-warp:

*Exceeds Type II minimum of 50 lbs.

Cross Machine Direction-fill:

*Exceeds Type II minimum of 55 lbs.

TEARING STRENGTH, SCALE

Machine Direction-warp:

*Exceeds Type II minimum of 25lbs.

Cross Machine Direction-fill:

*Exceeds Type II minimum of 25 lbs.

COLD CRACK RESISTANCE @ 20°F

No change

HEAT AGING (7 DAYS @ 158°F)

*Does not become stiff, brittle, discolored, or show loss of grain

SPECIFICATIONS / TESTING / CERTIFICATION

Federal Specification:

*CCC-408-D *Type II *Class A

CFFA Specification:

WA-101 *Type II *Class A

FIRE TESTING

ASTM-E84 Tunnel Test

Class A

NFPA286 Corner Burn Test

Class A

EU Class Flame (EN 15102)

Passed

BS476 Part 6&7

Passed

CAN/ULC-S102.2

Passed

*WA Certified NSF/ANSI 342

*Meets or exceeds requirements for flame spread, smoke developments and flashover.

MOLD/MILDEW/BACTERIAL RESISTANCE

ASTM-G21 Specifications:

Passed all requirements of CCCW-408-D

*Cadmium and Lead Free Formulation